
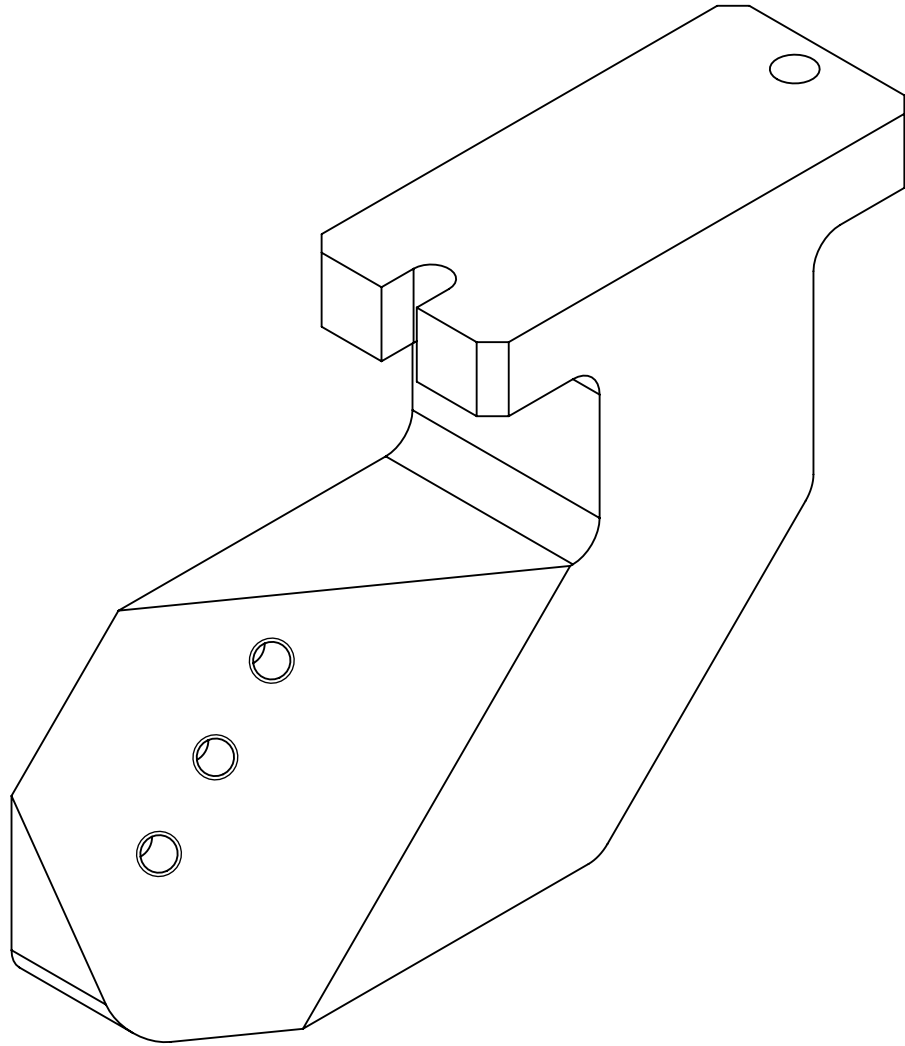



PROPRIETARY NOTICE:
This document and the information contained herein are confidential and proprietary to ATS Automation Tooling Systems Inc. (ATS) and may not be used, copied, distributed or disclosed without the prior express consent of ATS.
Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

LET. / IND.	REVISION	DRN. BY / GEZ. VON	DATE / DATUM
AA-00	INITIAL RELEASE	Igor Gabor	11/05/2026

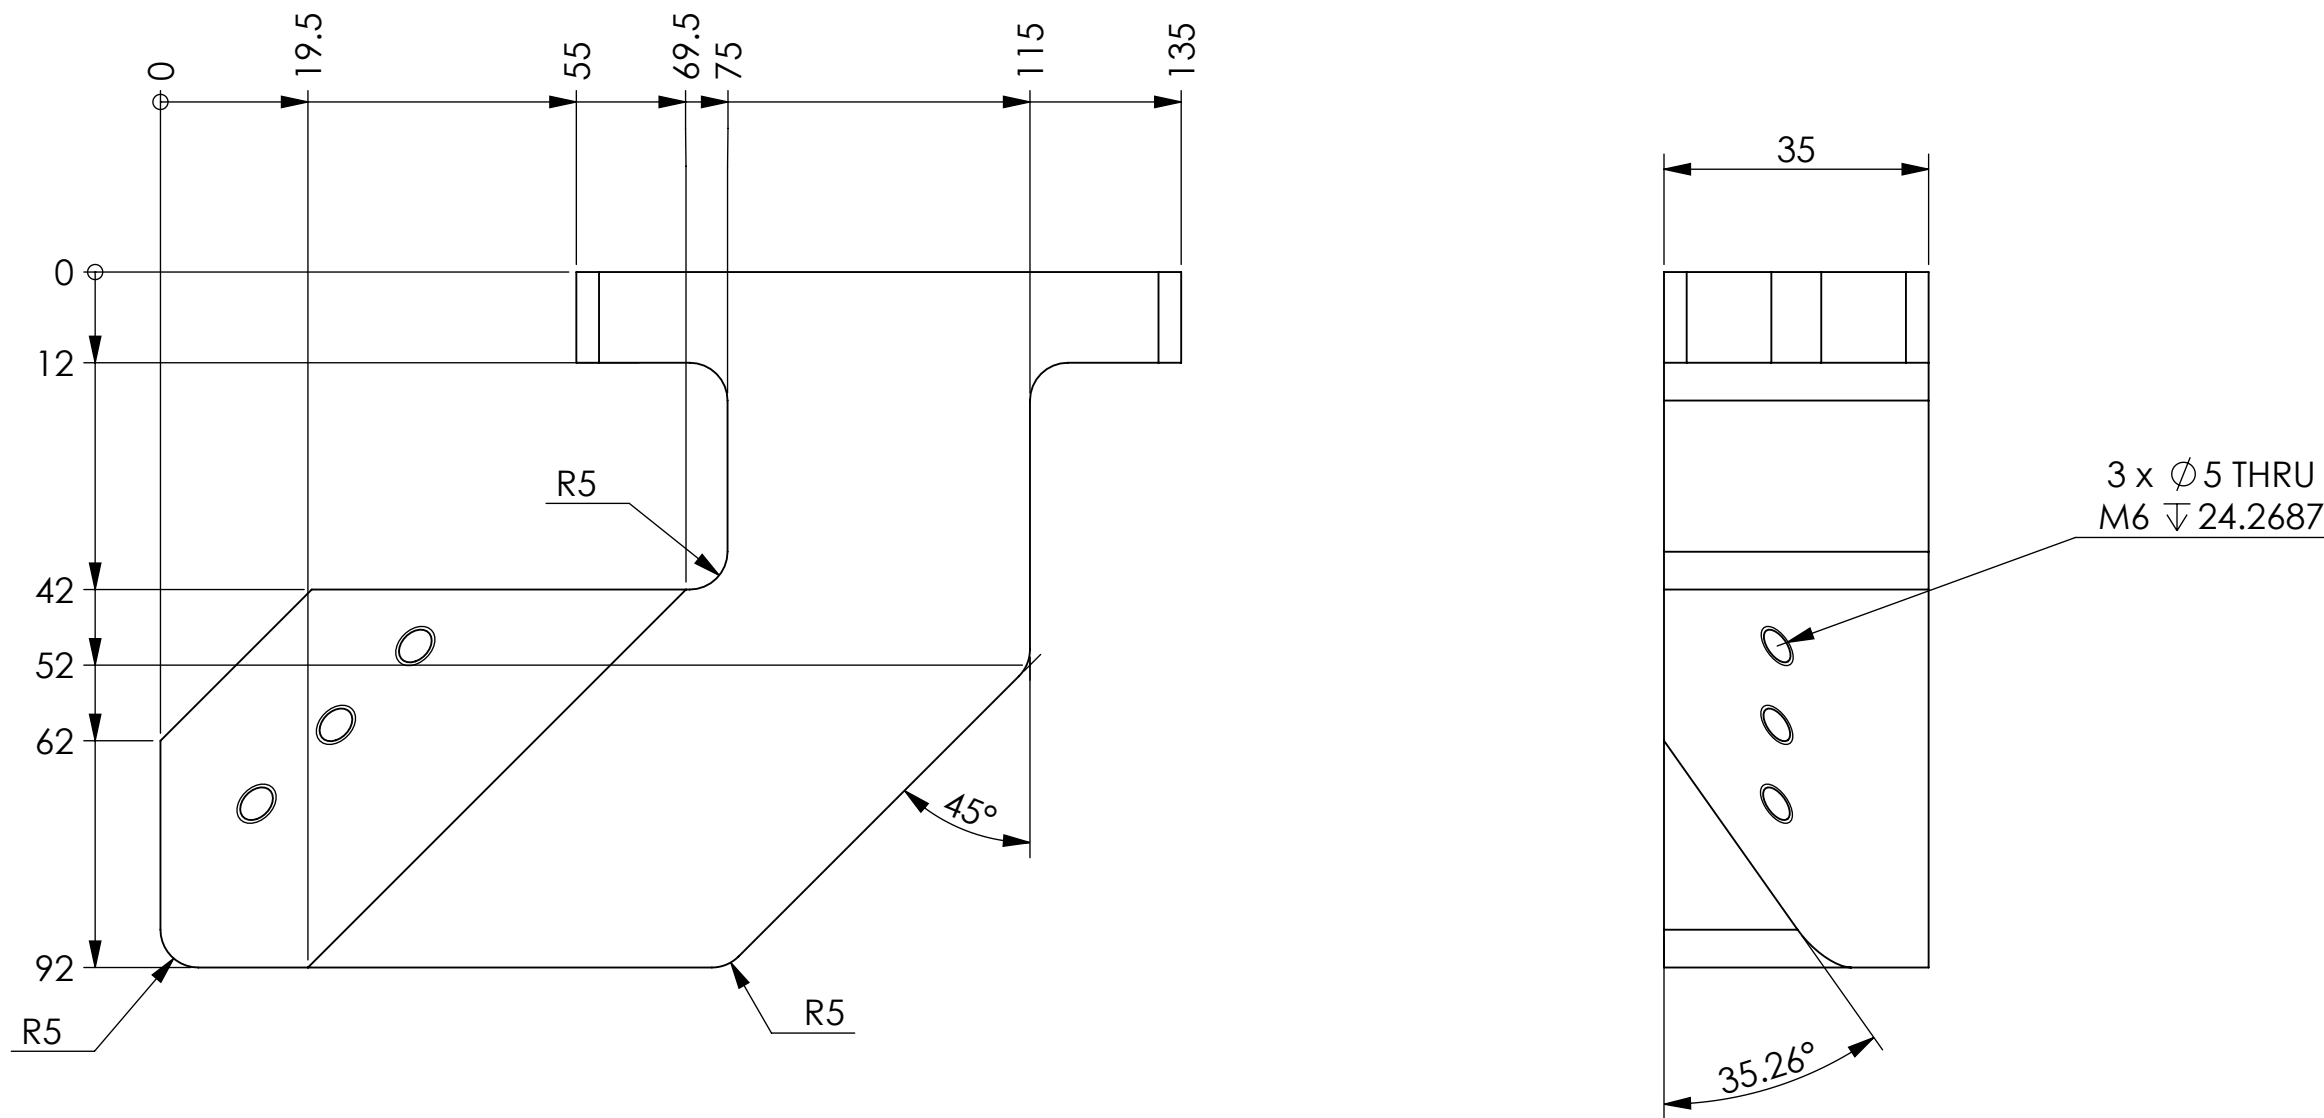

fehlende Maße sind dem CAD-Modell zu entnehmen
Missing dimensions have to be taken from the CAD model

Tolerances for Preferentially use
DO NOT USE TITLEBLOCK DECLARATIONS



General Positiontolerances (unless otherwise specified on drawing)					General Tolerances ISO 22081 (for undefined surfaces)					permanent marking with ITEM NUMBER max. font size 3mm XXXXXXXXXX	
for Clearance Holes, Slots and Threads = ±0,2 mm for Fit Holes, Slots = ±0,02mm					    						
					Linear Dimensions: see Table 1 Angular Dimensions: see Table 1						
Table 1 Dimensions in mm					General Tolerances (Based on DIN ISO 2768-mK) (unless otherwise specified on drawing)					General Surfaces (DIN ISO 1302) (unless otherwise specified on drawing)	
Dimensions	over 0.5 to 3	over 3 to 6	over 6 to 30	over 30 to 120	over 120 to 400	over 400 to 1000	over 1000 to 2000	over 2000 to 4000	 Rz6,3	for fit holes and slots	
Tolerances	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2			
Angle	to 10°	over 10° to 50°	over 50° to 120°	over 120° to 400°	over 400°	Edges DIN ISO 13715			 Rz25	for clearance holes and slots	
Tolerances	±1°	±0°30'	±0°20'	±0°10'	±0°5'	 +0,3	 +0,1				