

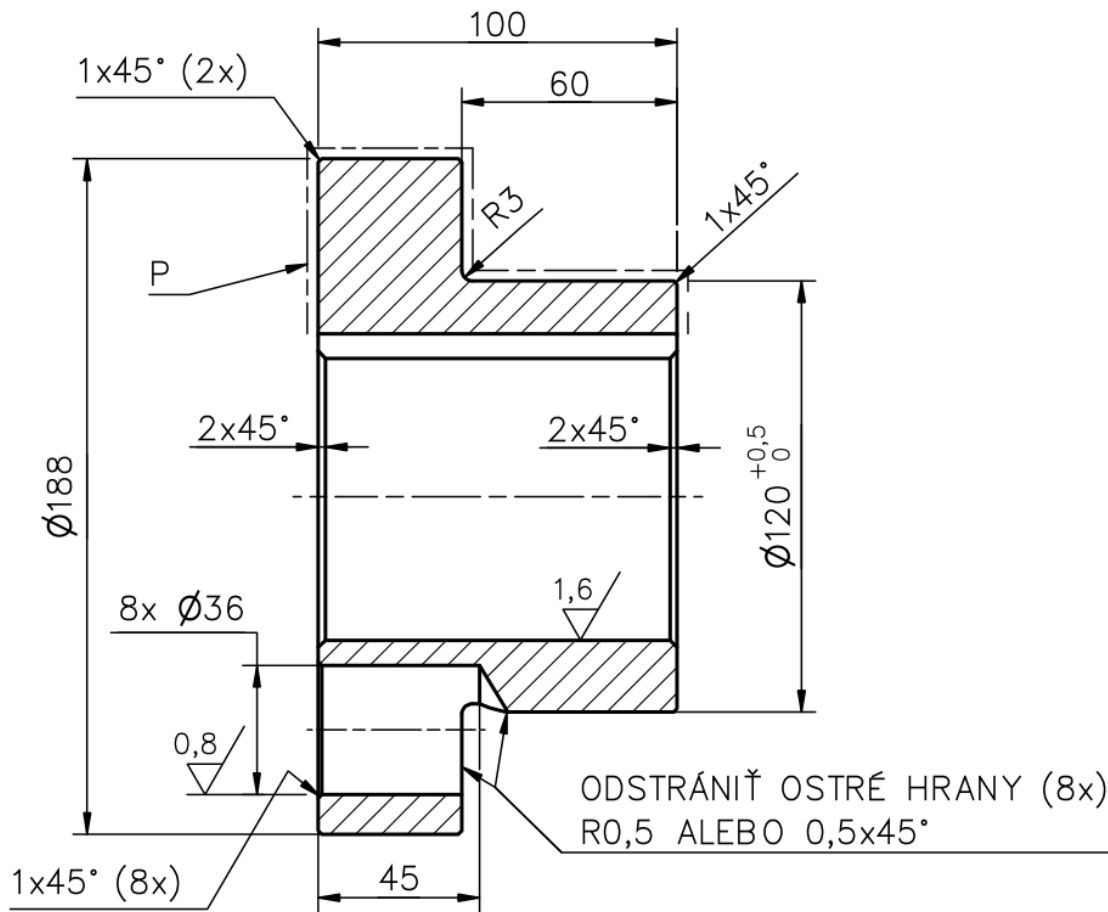


12,5 / (✓)

A-A (1 : 2)

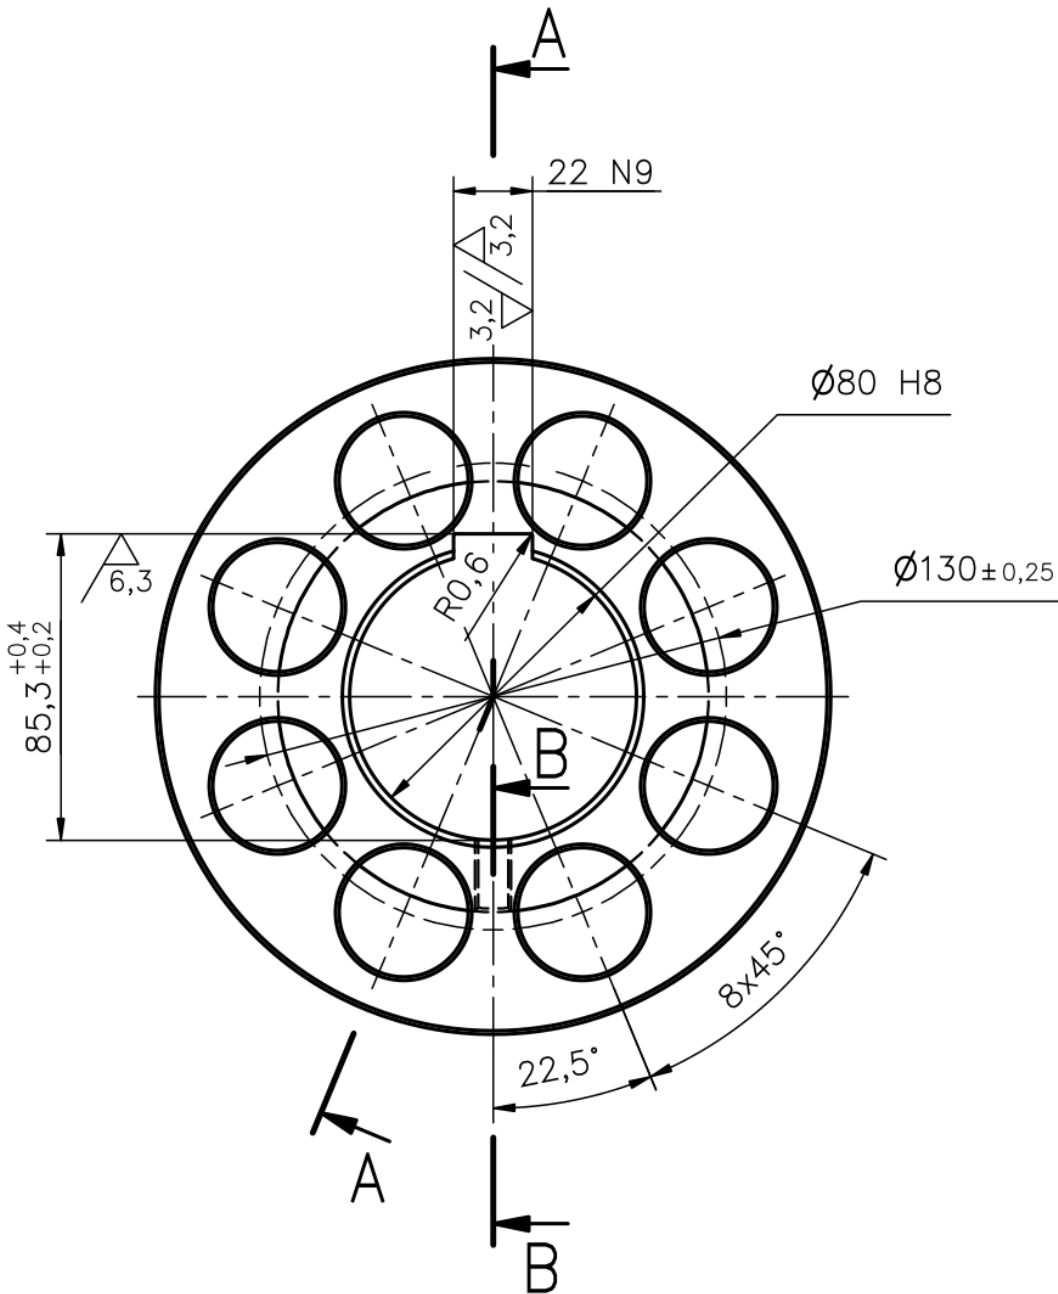

B-B (1 : 2)

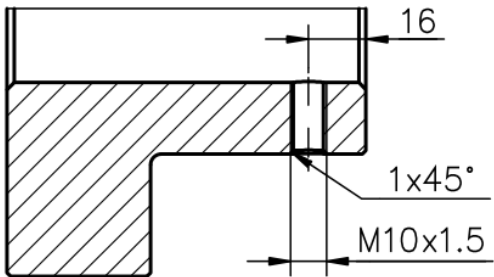

3. NÁHRADNÝ MATERIÁL: 14 220.6 (1.7131 / 16MnCr5+QT).
2. ZUŠLACHTIŤ NA PEVNOSŤ Rm = 800–900 MPa.
1. HMOTNOSŤ: 7,266 kg.

GENERAL TOLERANCES COMPLY WITH STN ISO 2768 - mK		THIS DRAWING IS THE PROPERTY OF DELTA DEFENCE a.s. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER, AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR KNOWLEDGE AND CONSENT. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY.		
DRAWN BY Z.Goga	DATE 8. 9. 2026	DELTA DEFENCE a.s. BRATISLAVA		
MATERIAL 12 061	FIRST ANGLE PROJECTION 	SCALE: 1:2	SHEET: 1 OF 1	
SEMIPRODUCT KR200	DESCRIPTION PRÍRUBA SPOJKY			
REFERENCE	SIZE A3	PART NO. DD-VYR-260908	REVISION	

5. NÁTER: RAL 3020 POLOMATNÁ. NA PLOCHE "P".
OTVORY A ZÁVITY CHRÁNIŤ.
4. POVRCHOVÁ ÚPRAVA: FOSFÁTOVAŤ ZnPh ALEBO FePh.

VÝROBA - DD-VYR-260908

Obj: DD090926 Počet kusov: 1 ks DielID: 763

Cenová ponuka: DD090926



1. Rezanie (akosť 1.0535 / C55, D190-103)

pozn: 22,92 kg

2. Sústruženie

3. Frézovanie

4. FOSFÁT

5. Lakovanie

pozn: RAL 3020 PLOCHA P