
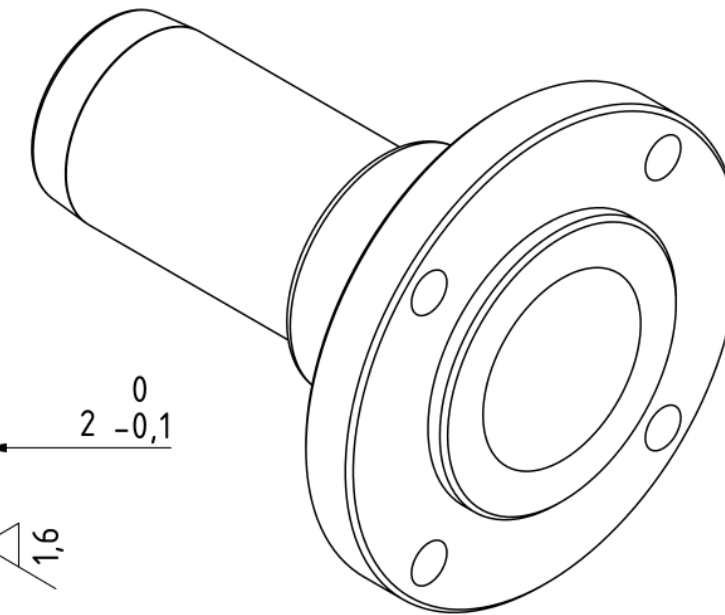
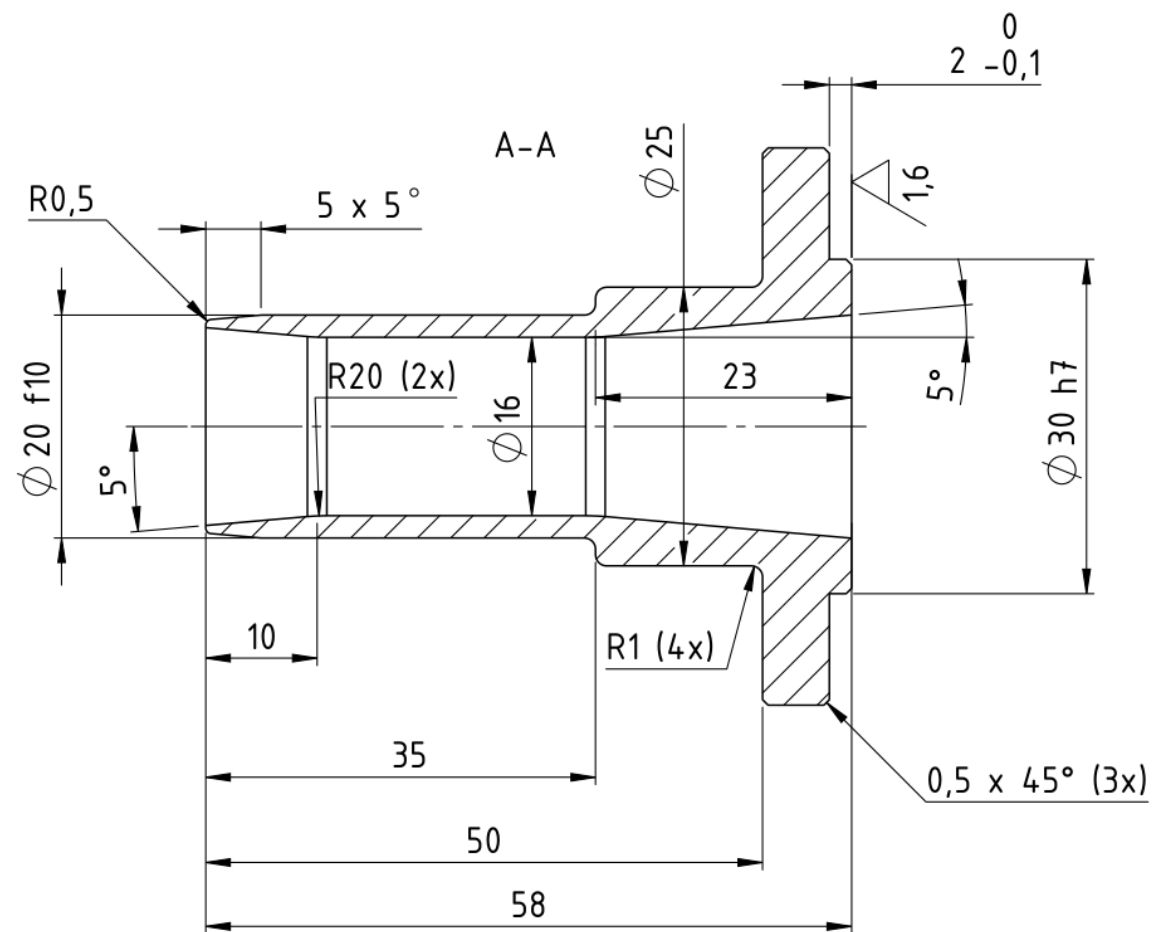


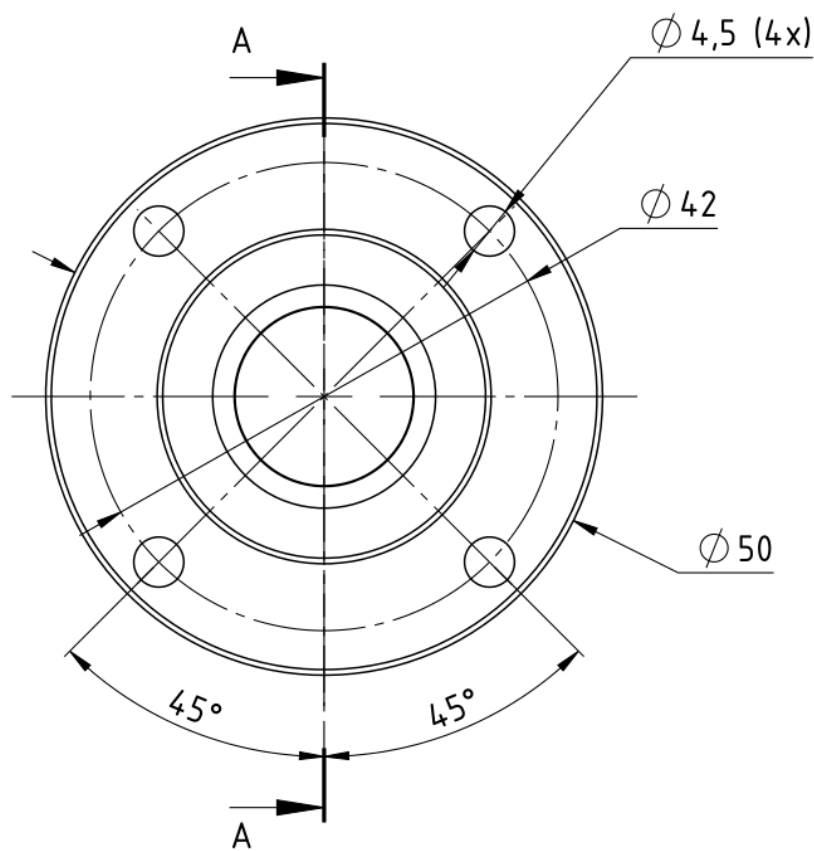

3,2

- NOTES:
1. DEBURR ALL SHARP EDGES
 2. POSITION TOLERANCE OF HOLES AND THREADS ± 0.2 mm
 3. APPROX. WEIGHT: 0.14 KG

GENERAL TOLERANCES COMPLY WITH STN ISO 2768-mK		THIS DRAWING IS THE PROPERTY OF TN CRAFT s.r.o., IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER, AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR KNOWLEDGE AND CONSENT. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY.		
DRAWN BY PG	DATE 2. 9. 2026	TN CRAFT s.r.o.		
MATERIAL 1.4571 (X6CrNiMoTi17-12-2)		FIRST ANGLE PROJECTION 	SCALE: 3:2	SHEET: 1 OF 1
FINISH NONE		DESCRIPTION HUB		
REFERENCE NONE	SIZE A3	PART NO. EX-CL-3G02	REVISION 0A	

VÝROBA - EX-CL-3G02

Obj: GT030926 Počet kusov: 1 ks DielID: 733

Cenová ponuka: CS

Medzné rozmery tolerovaných mier (uloženia podľa ISO 286):

20f10: 19,896 – 19,980 mm



1. Rezanie (akosť 1.4571 / X6CrNiMoTi17-12-2, D50)

pozn: 0,90 kg (polotovár)

2. Sústruženie

3. Frézovanie

4. Zámočník