



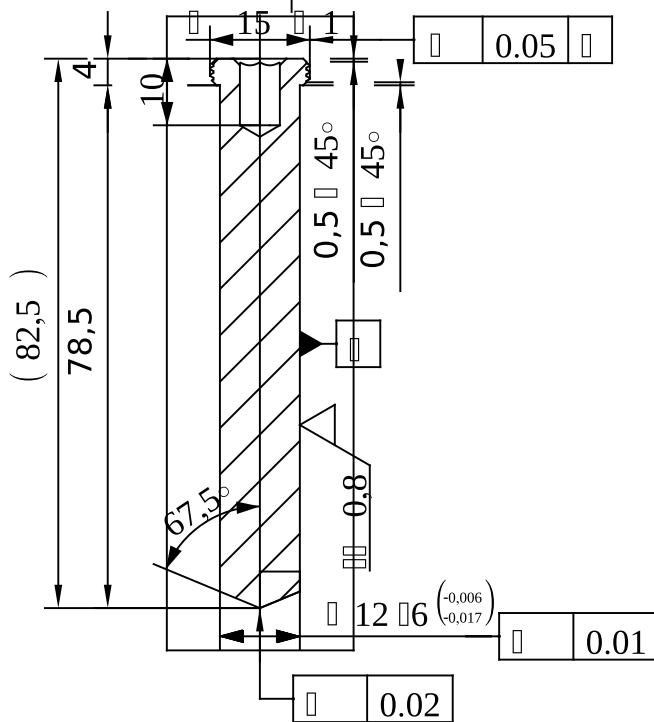


CHRAŇ ZAVIT PASTOU
PRED CEMENTACIOU

TEPELNE SPRACOVANIE

- CEMENTOVAT 0,5 - 0,8mm
- KALIT NA TVRDOST 60 - 65 HRC

- BEZ POVRCHOVEHO NATERU ALEBO INEHO POVLAKOVANIA
- ODJEHLIT



Ra 3,2

Vyhotovené spoločnosťou MHdesigns, s.r.o.

Zakazník c.: / Customer No.: -

This drawing is the property of company MHdesigns, s.r.o.
It must not be reproduced or copied and must be
returned at any time upon demand. This drawing is also
confidential and must be disclosed to no other than
employee requiring it for the job. It is a condition under
which the job is placed that no goods will be made,
modified or repaired from this drawing except in accordance
with an official order from company MHdesigns, s.r.o.

a

Revízia
Rev

Datum
Date

Zmenil
Changed

Popis vykonanej revízie zmeny
Revision Record

MH designs, s.r.o.
strojna konstrukčná kancelária

M. Benku 2423/2
Topolčany 95503
TEL.: +421(0)949 754 265
mail: michal.holdy@mhdesigns.sk
web: http://www.mhdesigns.sk

Mierka:
Scale:

1:1

Váha:
Weight:

0,0703

kg

Material:
Material:

16MnCr5

Materialové spracovanie:
Material treatment:

normalizovaná

Názov:
Title:

OS

Databázové číslo:
Part-No.:

25120117

Jednotky:
Unit:

mm

2026

Datum
Date:

Meno:
Name:

Všeobecná tolerancia:
Permissible tolerance:

ISO 2768-mK

Oddelenie:
Department:

MH designs, s.r.o.

Stav povrchu:
Surface:

Návrhol:
Design:

21.07.

holdy

Skreslil:
Drawn:

21.07.

holdy

Uvolnil:
Appr.:

Strana:
Sheet:

18

z celku:
of:

25