
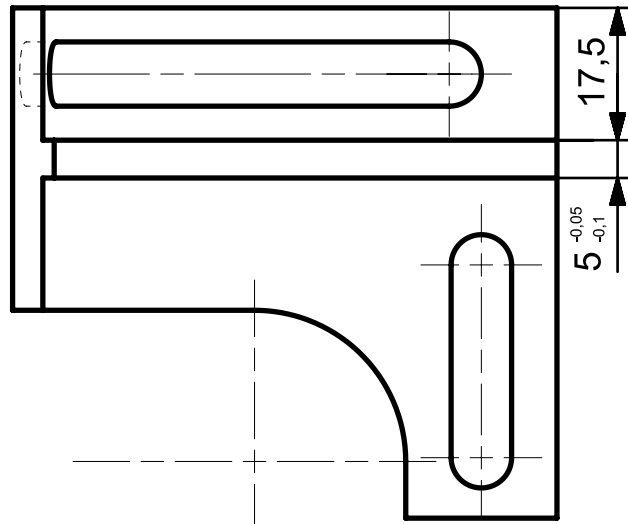
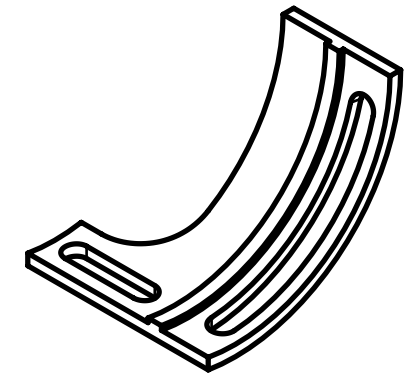
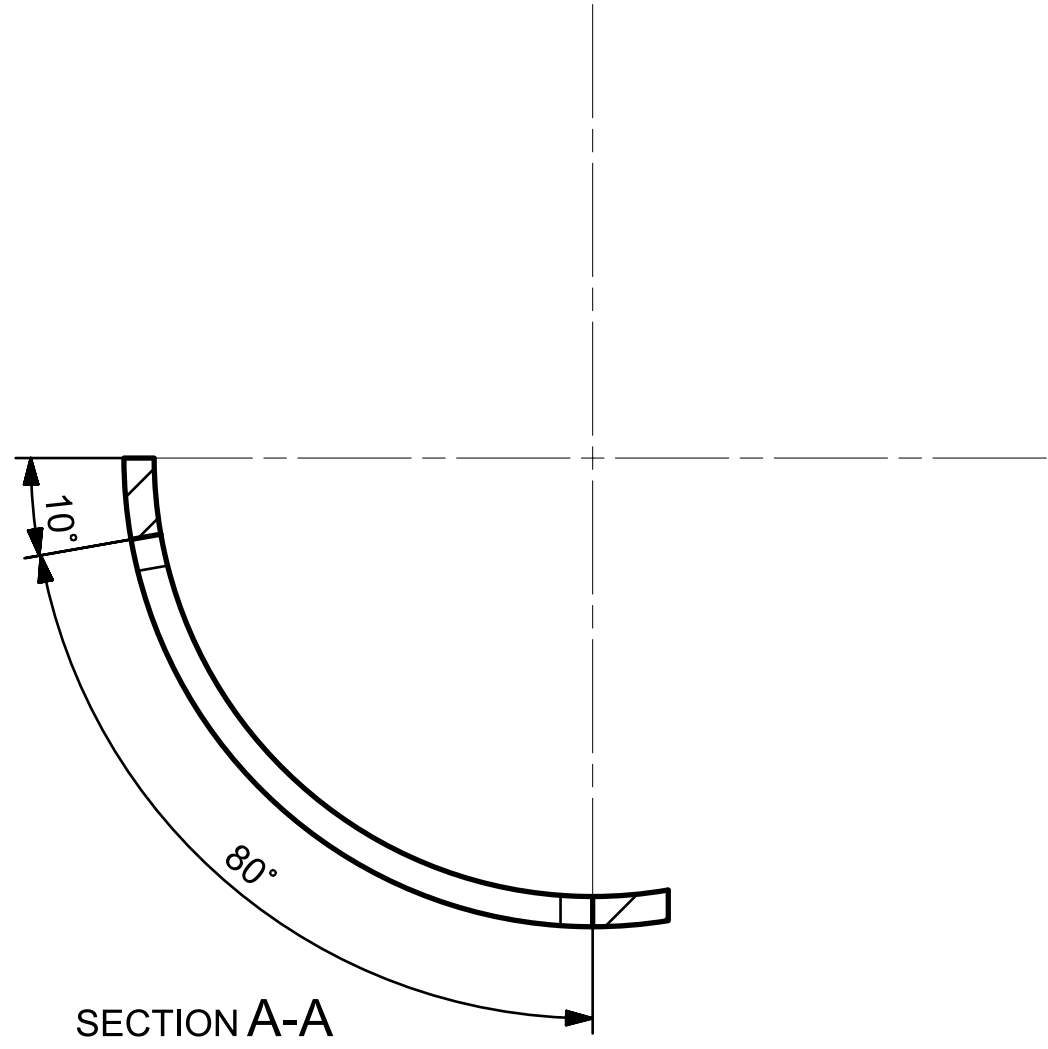
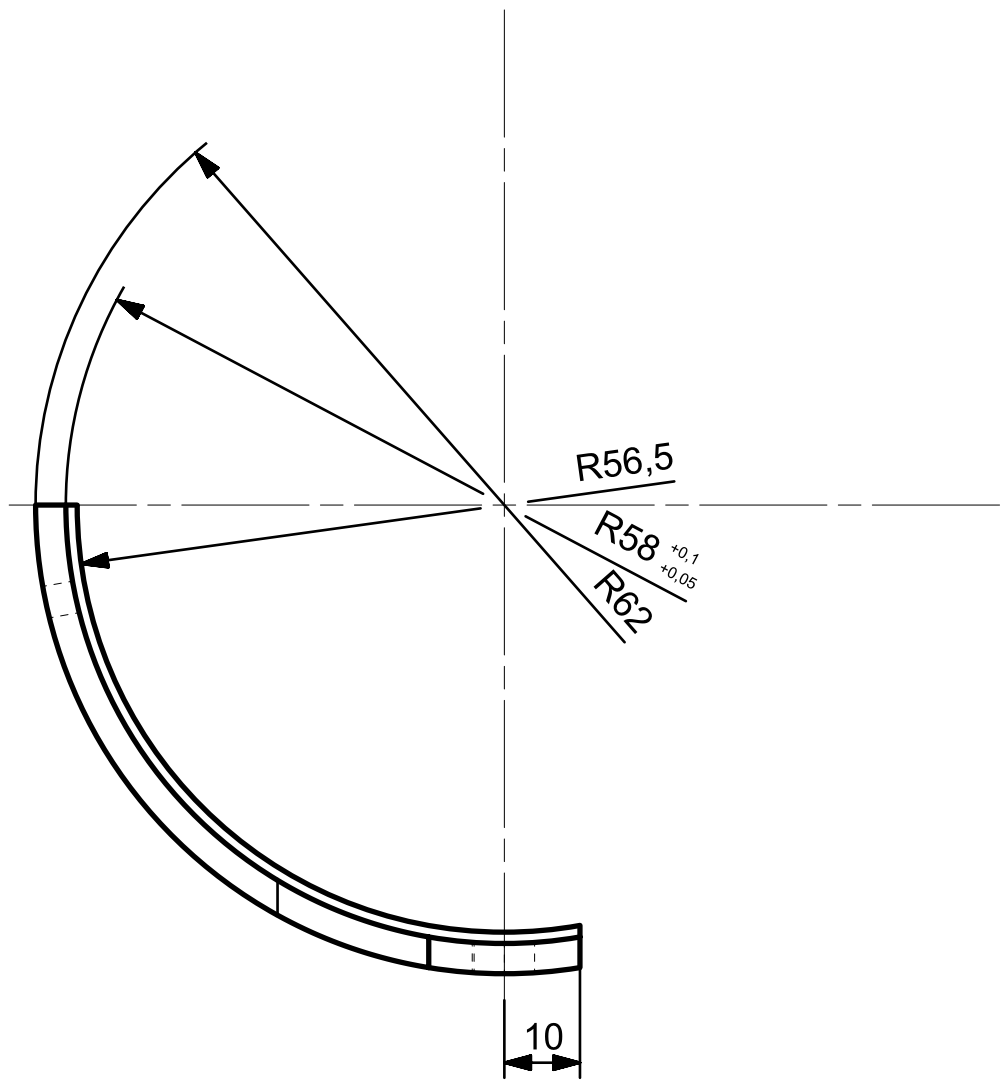


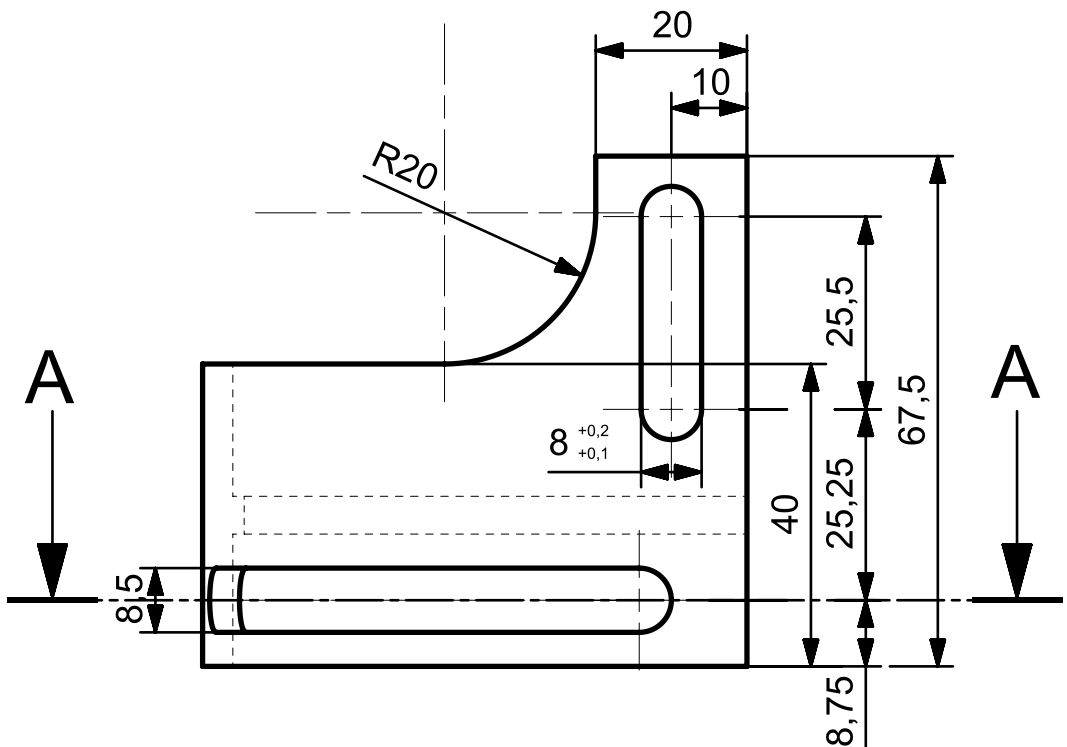

Vypis z technickej normy ISO 2768-mK			
Extract from the technical standard ISO 2768-mK			
Dĺžková miera		Uhľová miera	
Length ranges		Angular ranges	
>120 - 400	± 0,5	>50 - 120	± 0,33°
> 30 - 120	± 0,3	>10 - 50	± 0,5°
> 6 - 30	± 0,2	<10	± 1°
> 0,5 - 6	± 0,1		
< 0,5	± 0,05		
Zaoblenia a skosenia / Round cutters and chamfer heights			
<0,5	± 0,05	>3 - 6	± 0,5
>0,5 - 3	± 0,2	>6	± 1
Hrana - jehlenie			
workpiece edge - deburring			

Ostatné tolerancie:			
Other tolerances:			
Všeobecné tolerancie kontúry, profilu : ± 0,15			
General tolerances of radii and contours			
Všeobecné montážne tolerancie : ± 0,2			
General montage tolerances			

- BEZ TEPELNEHO SPRACOVANIA			
- BEZ POVRCHOVEHO NATERU ALEBO INEHO POVLAKOVANIA			
- ODJEHLIT			
Zákazník c.: / Customer No.: -			
This drawing is the property of company MHdesigns, s.r.o. It must not be reproduced or copied and must be returned at any time upon demand. This drawing is also confidential and must be disclosed to no other than employee requiring it for the job. It is a condition under which the job is placed that no goods will be made, modified or repaired from this drawing except in accordance with an official order from company MHdesigns, s.r.o.			
Mierka: Scale: 1 : 1			
Váha: Weight: 0,1268 kg			
Material: 16MnCr5			
Material treatment: normalizovaná			
Nazov: Title: DRZIAK LOZISKA VACKY			
Databázové číslo: Part-No: 25120118			
Jednotky: Unit: mm			
Číslo dokumentu: File-No: -			
Strana: Sheet: 19			
z celku of: 25			
Formát: Size: A2			
Pre nešpecifikované rozmery, pozri model			
For unspecified dimensions, refer to model.			