

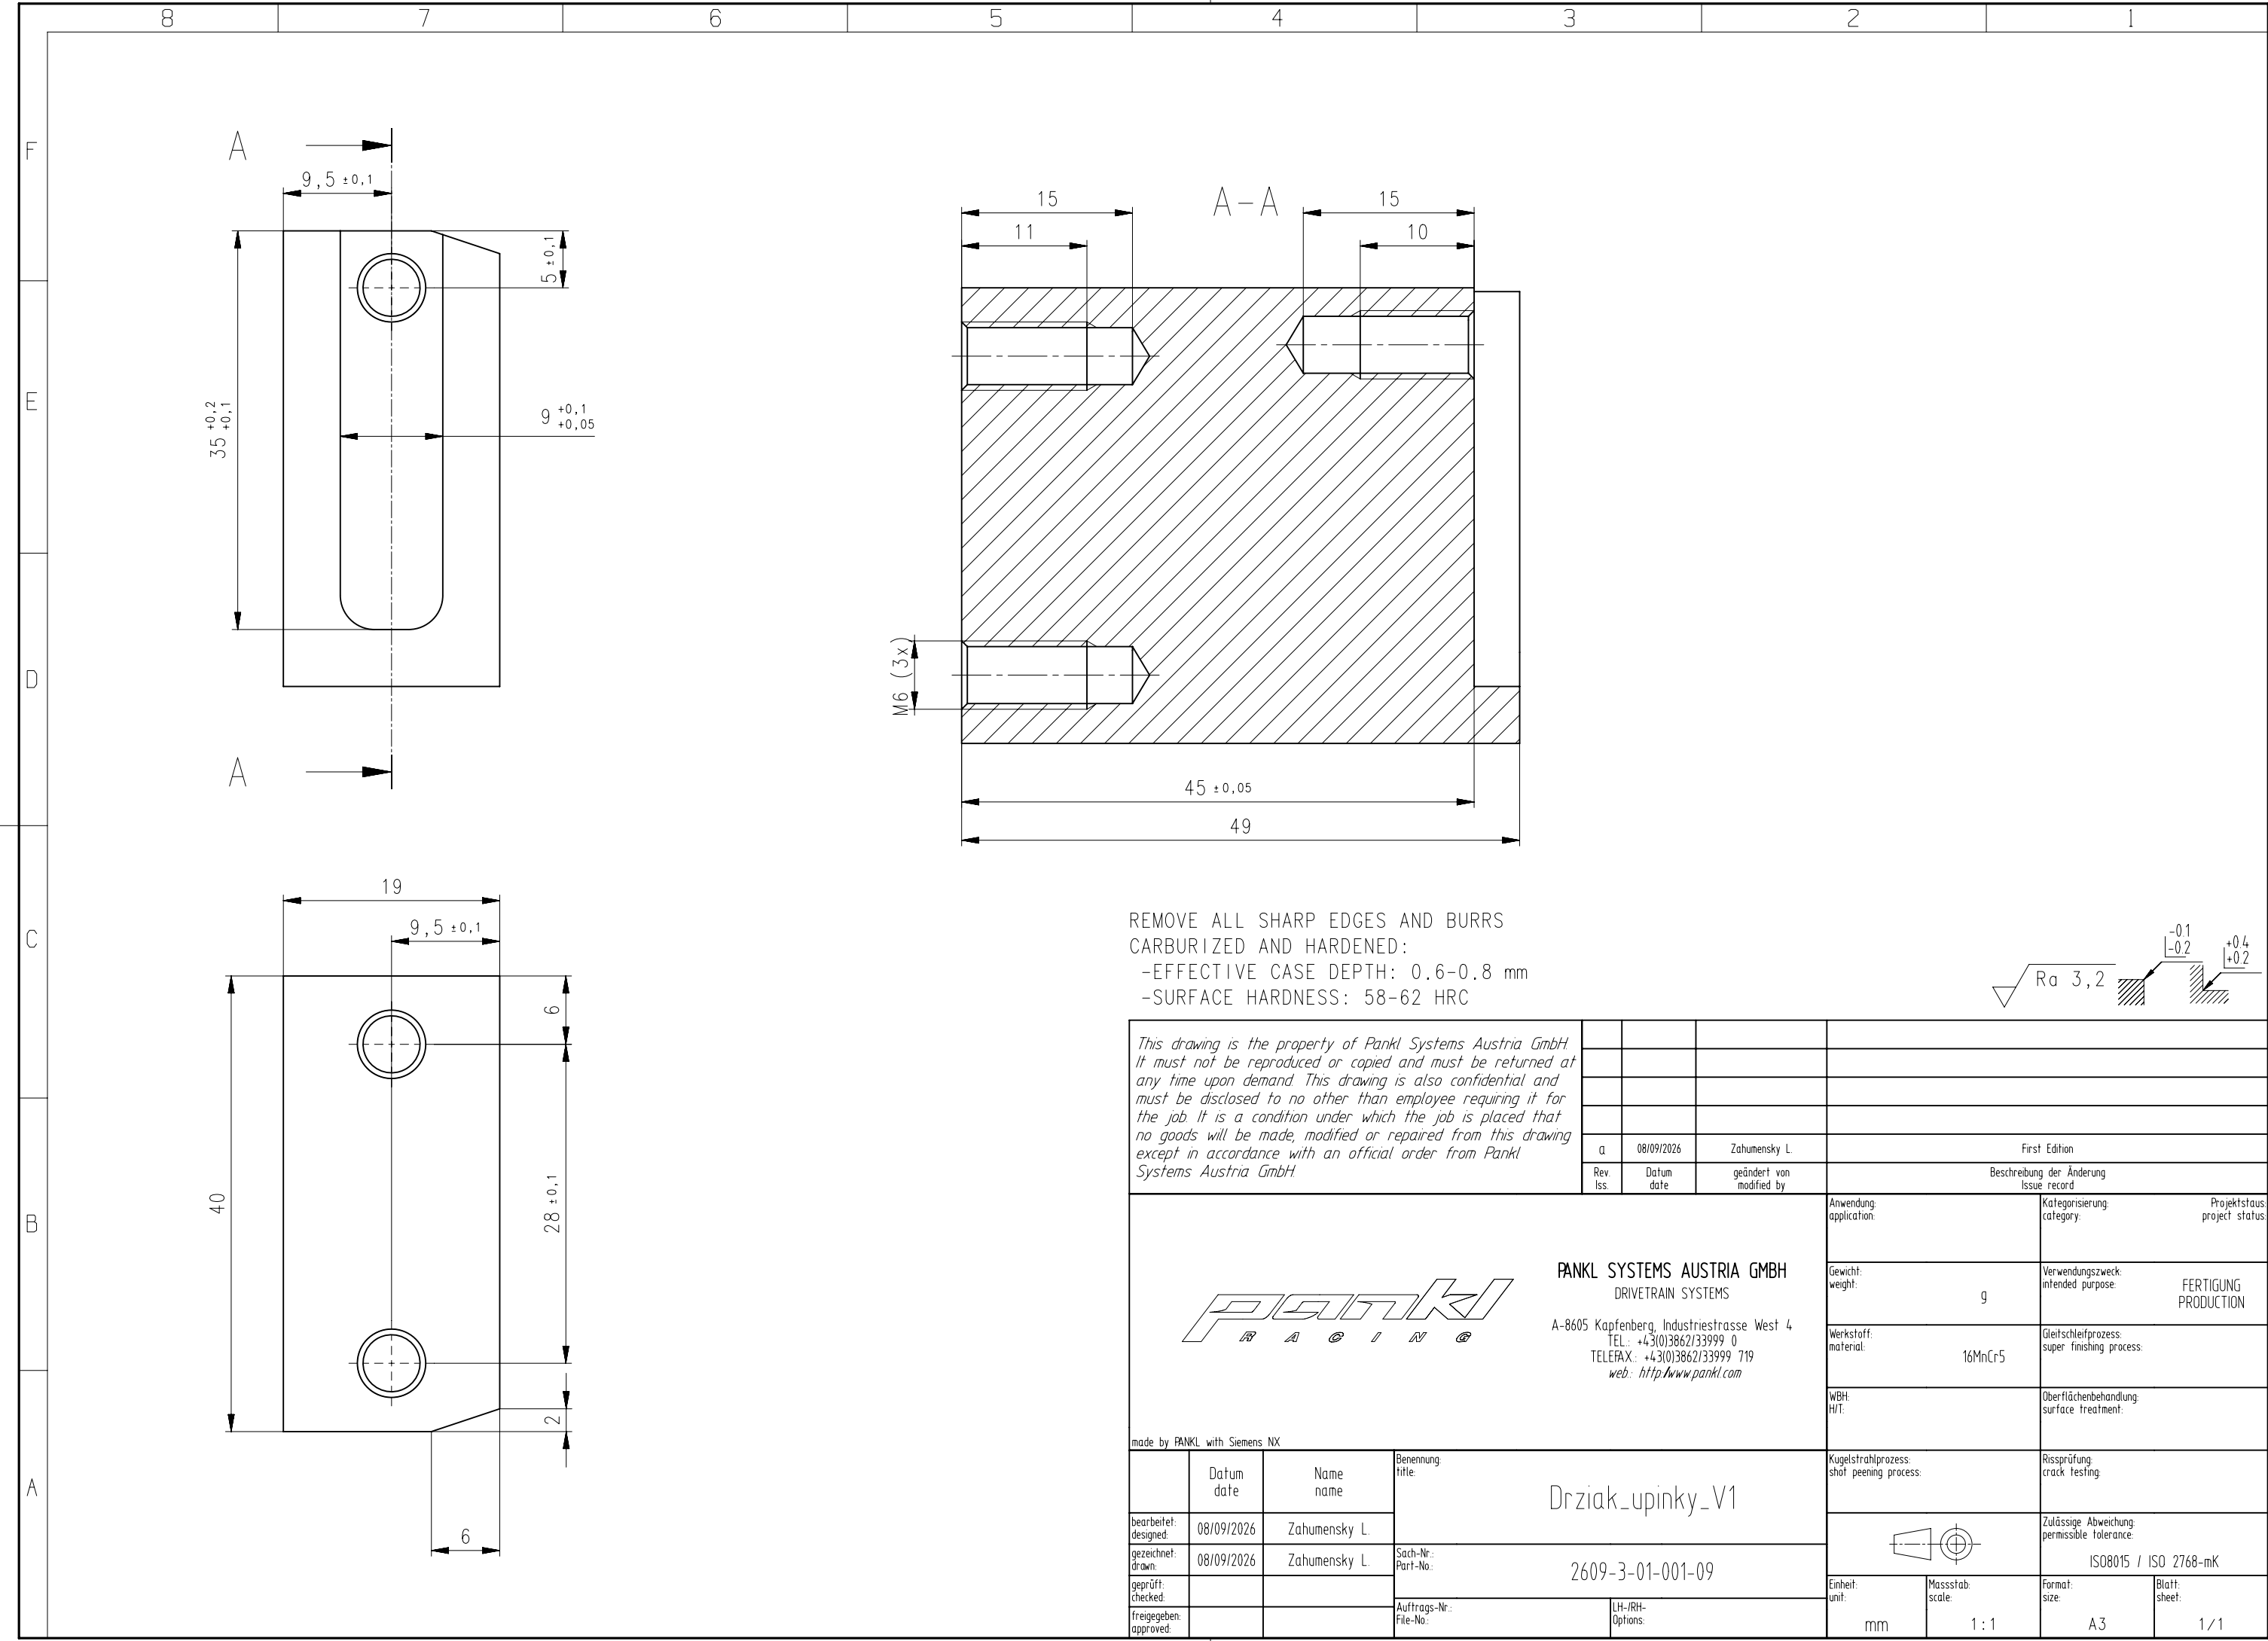
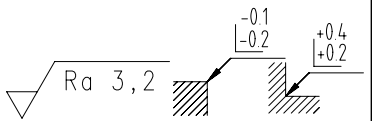




REMOVE ALL SHARP EDGES AND BURRS
CARBURIZED AND HARDENED:
-EFFECTIVE CASE DEPTH: 0.6-0.8 mm
-SURFACE HARDNESS: 58-62 HRC



<i>This drawing is the property of Pankl Systems Austria GmbH It must not be reproduced or copied and must be returned at any time upon demand This drawing is also confidential and must be disclosed to no other than employee requiring it for the job. It is a condition under which the job is placed that no goods will be made, modified or repaired from this drawing except in accordance with an official order from Pankl Systems Austria GmbH</i>								
				a	08/09/2026	Zahumensky L.	First Edition	
Rev. Iss.	Datum date	geändert von modified by	Beschreibung der Änderung Issue record					
 PANKL SYSTEMS AUSTRIA GMBH DRIVETRAIN SYSTEMS A-8605 Kapfenberg, Industriestrasse West 4 TEL.: +43(0)3862/33999 0 TELEFAX: +43(0)3862/33999 719 web: http://www.pankl.com made by PANKL with Siemens NX				Anwendung: application:	Kategorisierung: category:	Projektstatus: project status:		
				Gewicht: weight:	g	Verwendungszweck: intfended purpose:	FERTIGUNG PRODUCTION	
				Werkstoff: material:	16MnCr5	Gleitschleifprozess: super finishing process:		
				WBH: H/T:		Oberflächenbehandlung: surface treatment:		
				Kugelstrahlprozess: shot peening process:		Rissprüfung: crack testing:		
					Zulässige Abweichung: permissible tolerance:			
					ISO8015 / ISO 2768-mK			
Einheit: unit:		Massstab: scale:		Format: size:	Blatt: sheet:			
mm		1 : 1		A3	1 / 1			