

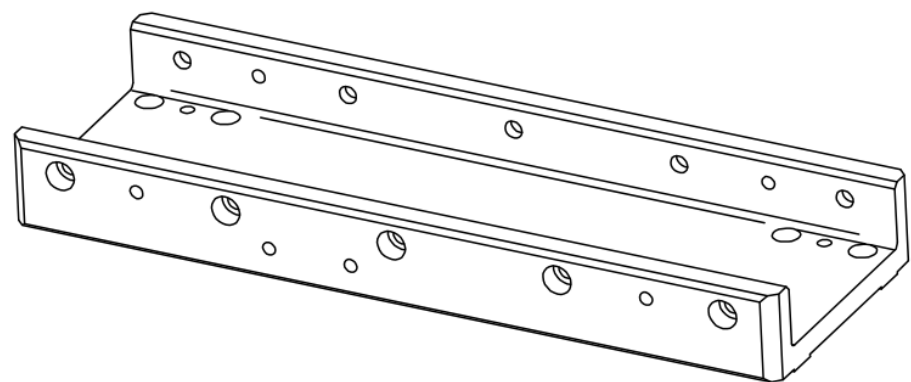


A-A (1 : 1)

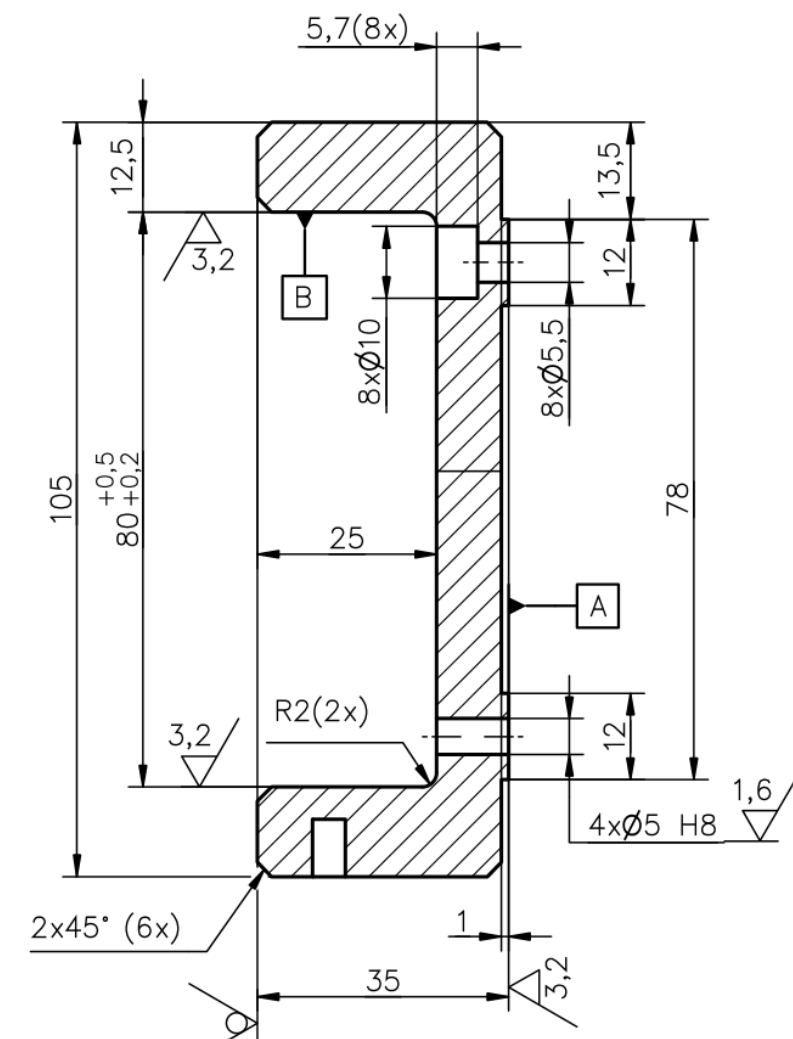


B

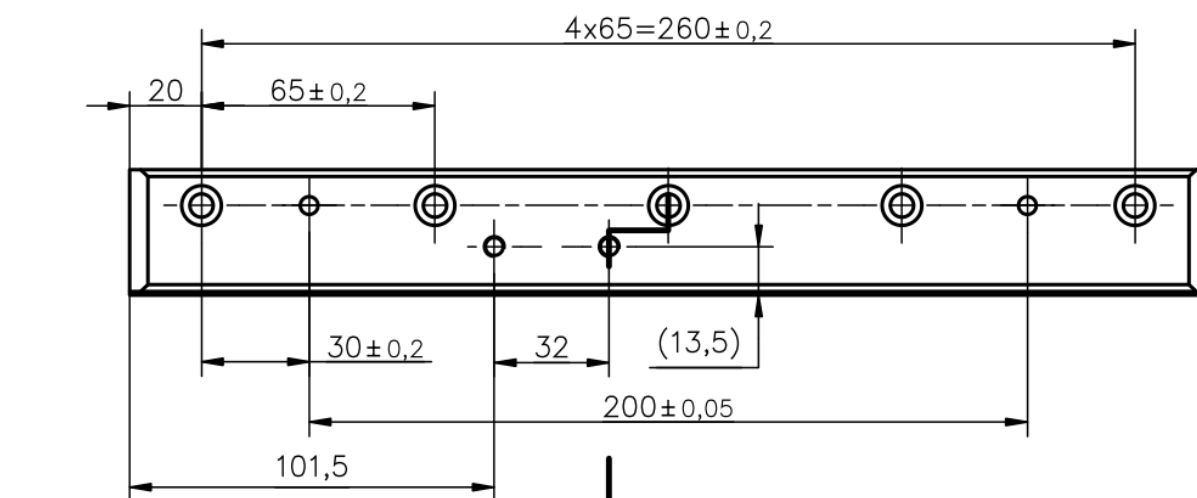


A


B

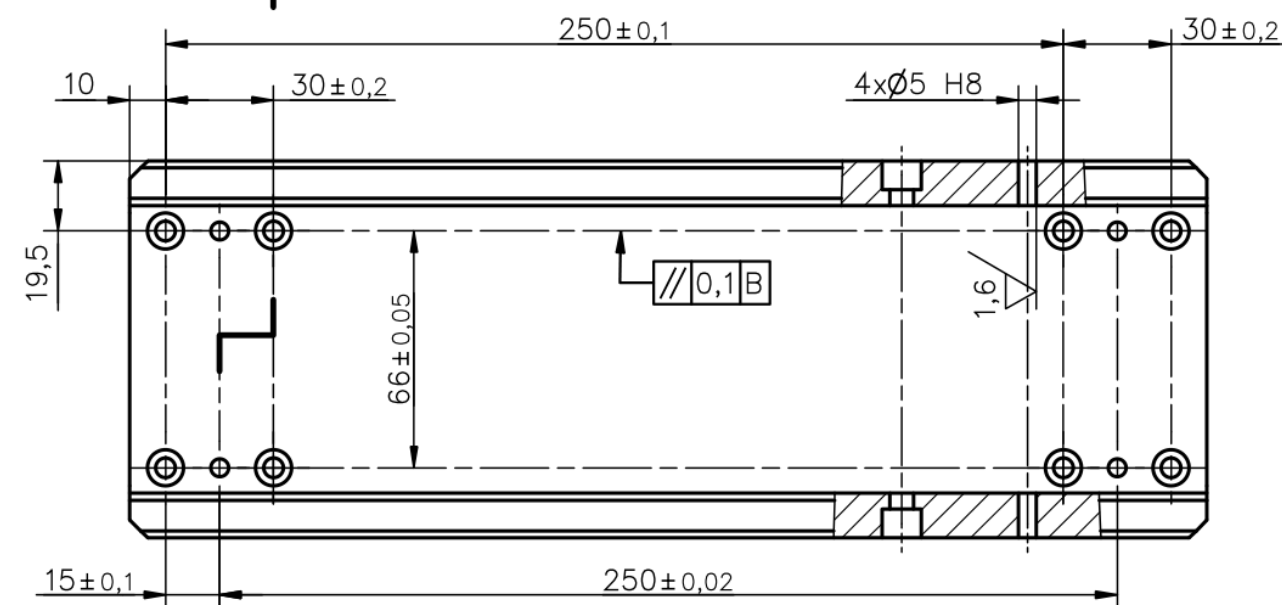


A

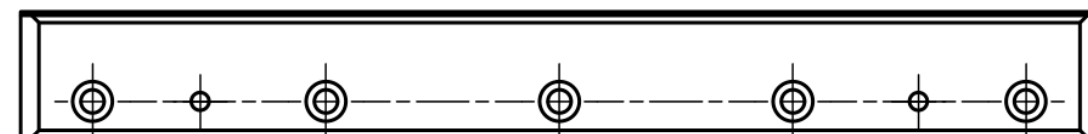

B-B (1 : 1)

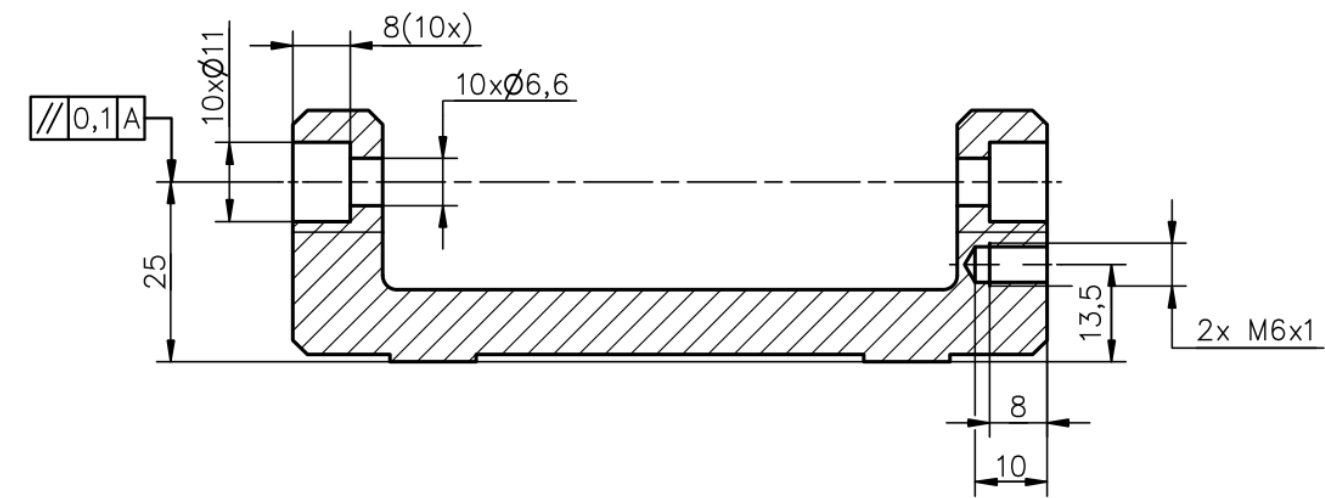

C (1 : 2)

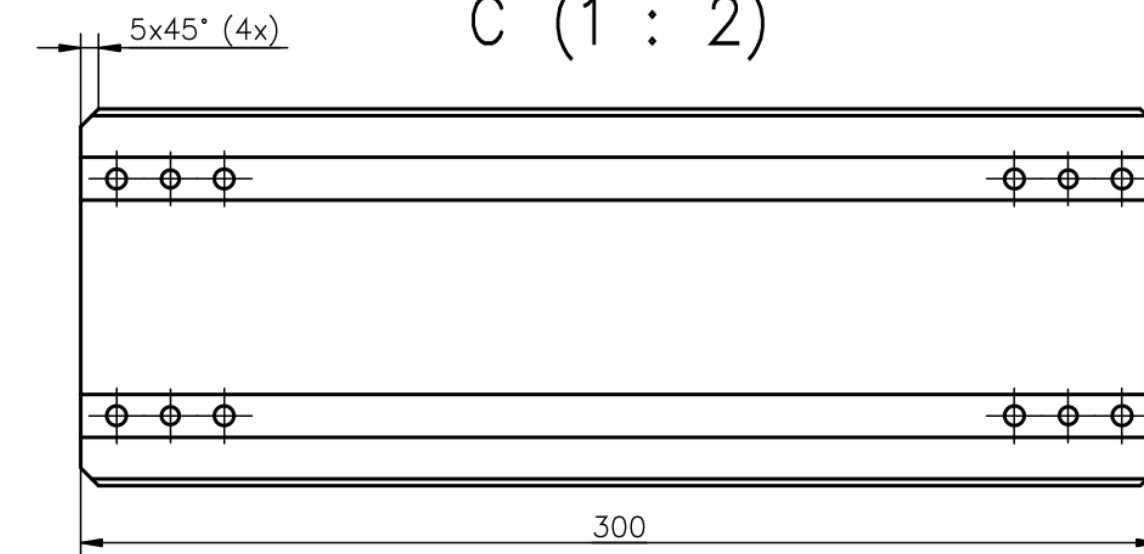

4. NÁHRADNÝ MATERIAL: EN AC 5083, EN AW 6060, EN AW 6082, EN AW 2007.
3. POVRCHOVÁ ÚPRAVA: AN. OX.
2. ODSTRÁNIŤ OSTRÉ HRANY.
1. HMOTNOSŤ: 1,241 kg.

GENERAL TOLERANCES COMPLY WITH		THIS DRAWING IS THE PROPERTY OF DELTA DEFENCE a.s. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER, AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR KNOWLEDGE AND CONSENT. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY.		
STN ISO 2768 - mK				
DRAWN BY	DATE	DELTA DEFENCE a.s. BRATISLAVA		
ZG	14. 11. 2024			
MATERIAL	EN AW 5083	FIRST ANGLE PROJECTION	SCALE:	SHEET:
SEMIPRODUCT	P35		1:2	1 OF 1
REFERENCE	KS4A-42.0101	DRŽIAK		
	SIZE	PART NO.	REVISION	
	A33	KS4A-42.0101		

VYROBA - KS4A-42.0101_

Obj: BE300626 DielID: 47



1. Rezanie (akost EN AW 5083, 305*110*40, pozn: 3,62 kg)
2. Frezovanie
3. Elox prirodny
4. Zamocnik