

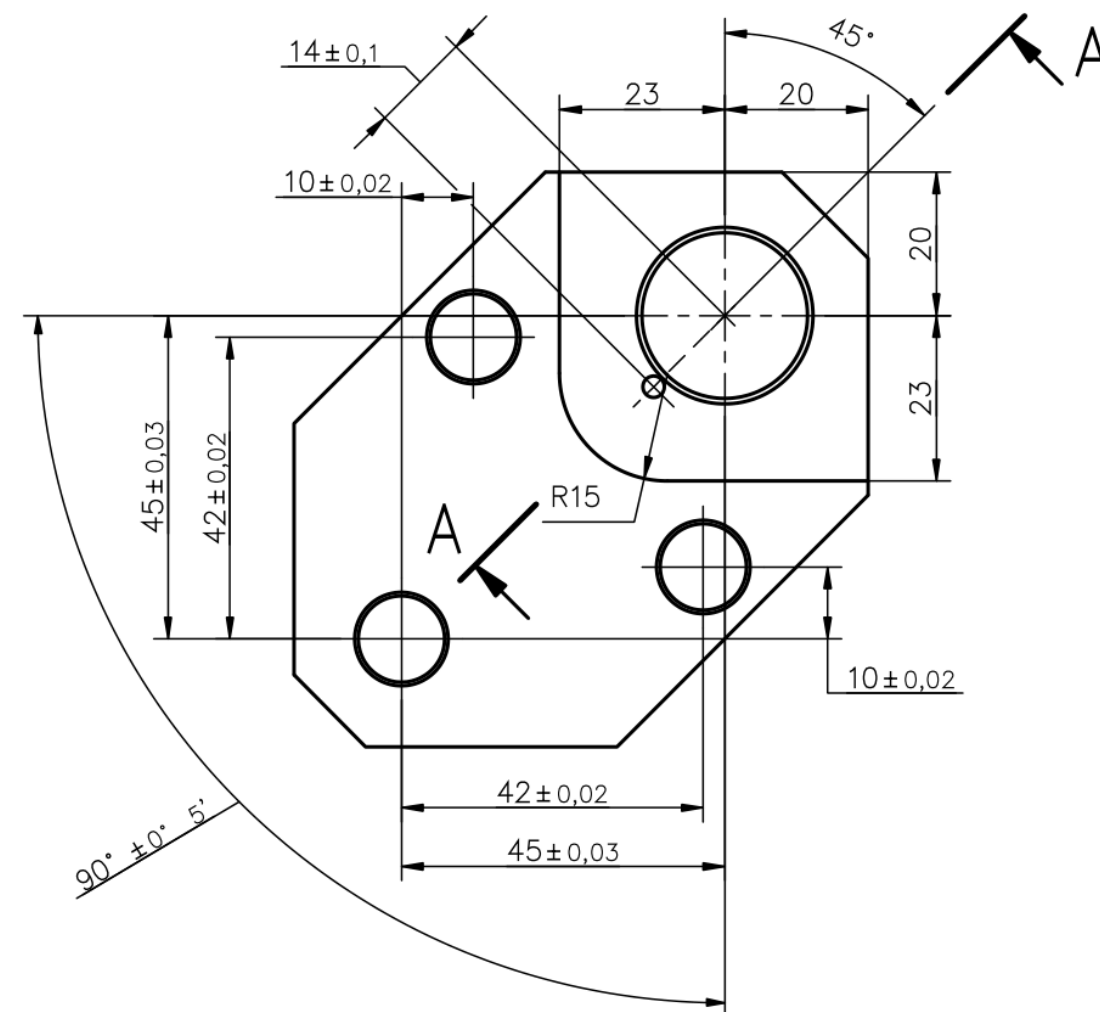
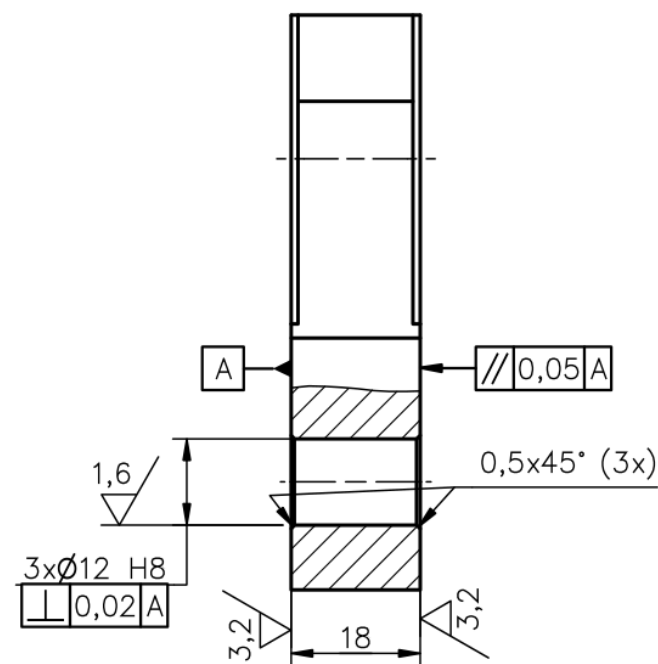
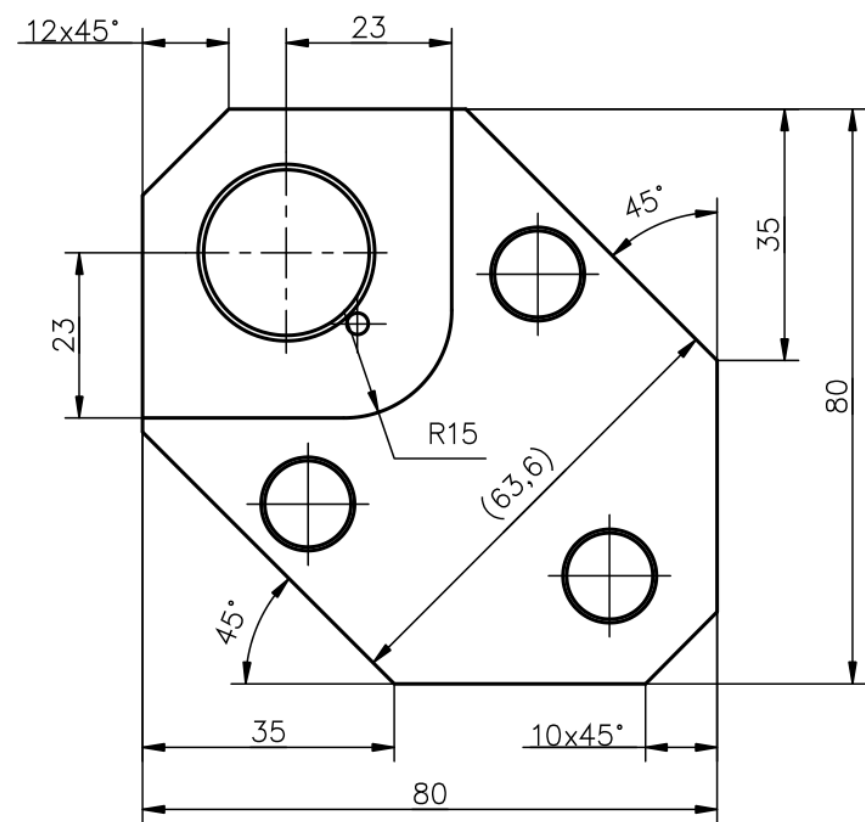


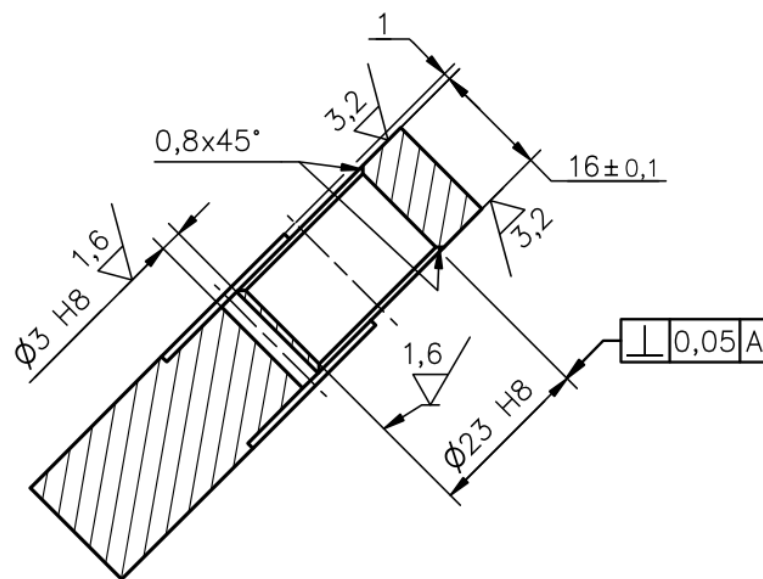

A-A (1 : 1)

6,3/ (✓)



4. NÁHRADNÝ MATERIAL: EN AC 5083, EN AW 6060, EN AW 6082, EN AW 2007.
3. POVRCHOVÁ ÚPRAVA: AN. OX.
2. ODSTRÁNIŤ OSTRÉ HRANY.
1. HMOTNOSŤ: 0.202 kg.

GENERAL TOLERANCES COMPLY WITH STN ISO 2768 - mK		THIS DRAWING IS THE PROPERTY OF DELTA DEFENCE a.s.. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER, AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR KNOWLEDGE AND CONSENT. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY.		
DRAWN BY ZG	DATE 3. 2. 2025	DELTA DEFENCE a.s. BRATISLAVA		
MATERIAL EN AW 5083		FIRST ANGLE PROJECTION 	SCALE: 1:1	SHEET: 1 OF 1
SEMIPRODUCT P20		DESCRIPTION UCHO		
REFERENCE KS4A-45.0100		SIZE A3	PART NO. KS4A-45.0104	REVISION a

VYROBA - KS4A-45.0104_

Obj: BE300626 DielID: 60



1. Rezanie (akost EN AW 5083, 85*85*23, pozn: 0,45 kg)
2. Frezovanie
3. Zamocnik
4. Elox prirodny (pozn: 0,20 kg)