


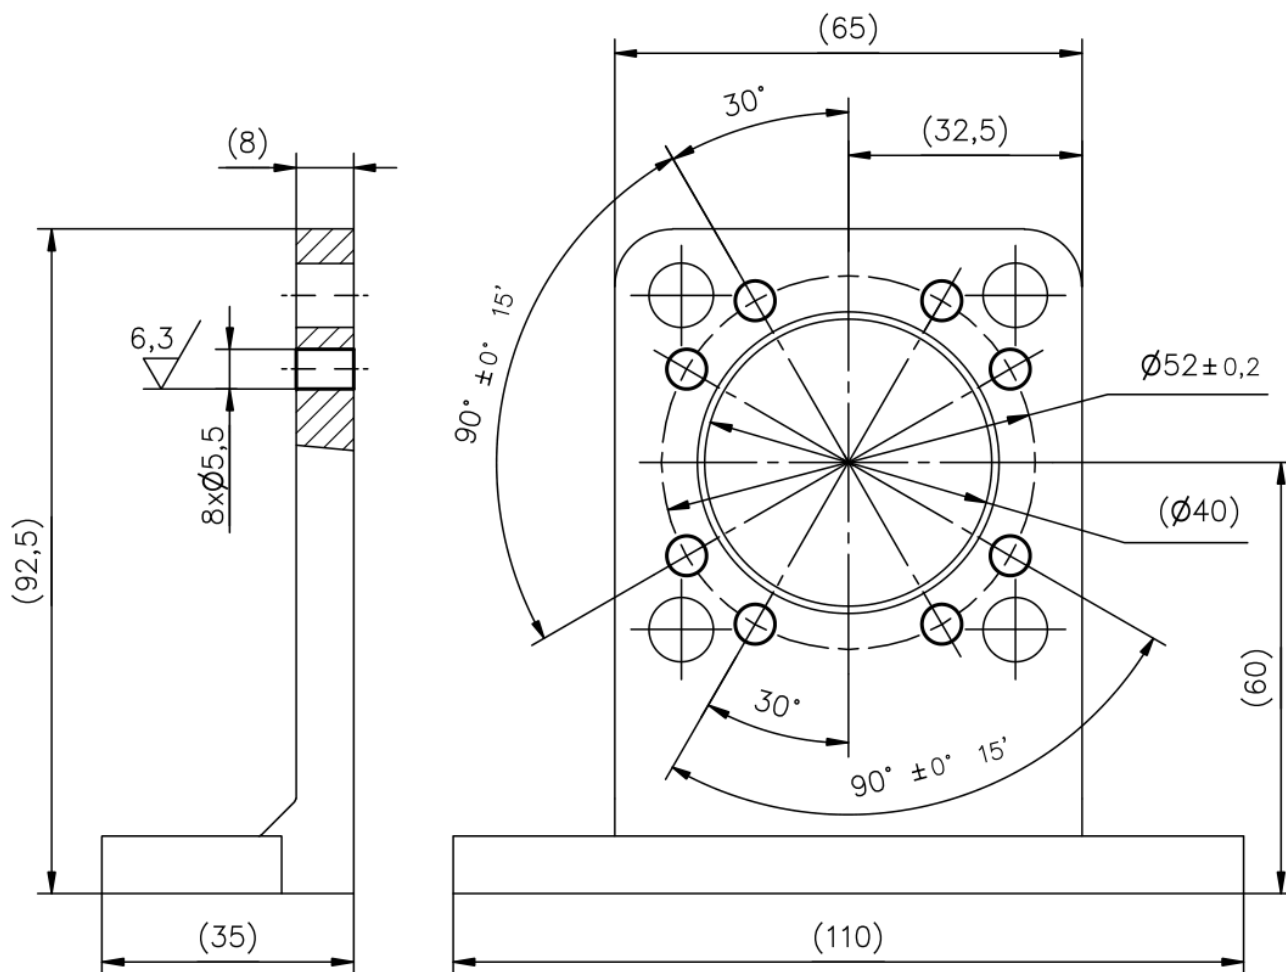

3. OPRACOVANÉ PLOCHY 1x NÁTER ZINKOVOU FARBOU.
2. NA VRTANÝCH OTVOROCH ODSTRÁNIŤ OSTRÉ HRANY 0,3x45°.
1. HMOTNOSŤ: 0,447 kg.

GENERAL TOLERANCES COMPLY WITH STN ISO 2768 - mK		THIS DRAWING IS THE PROPERTY OF DELTA DEFENCE a.s. IT IS NOT TO BE COPIED OR DUPLICATED IN ANY MANNER, AND SHALL NOT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR KNOWLEDGE AND CONSENT. IT SHALL BE USED AS A MEANS OF REFERENCE TO WORK FURNISHED BY THIS COMPANY ONLY.		
DRAWN BY ZG	DATE 20. 11. 2024	DELTA DEFENCE a.s. BRATISLAVA		
MATERIAL OCEL, ZN		FIRST ANGLE PROJECTION 	SCALE: 1:1	SHEET: 1 OF 1
SEMI-PRODUCT EMC50 BG, R15613B105 BOSCH+REXROTH		DESCRIPTION PÄTKA-ÚPRAVA		
REFERENCE KS4A-45.0100		SIZE A4	PART NO. KS4A-45.0105	REVISION