



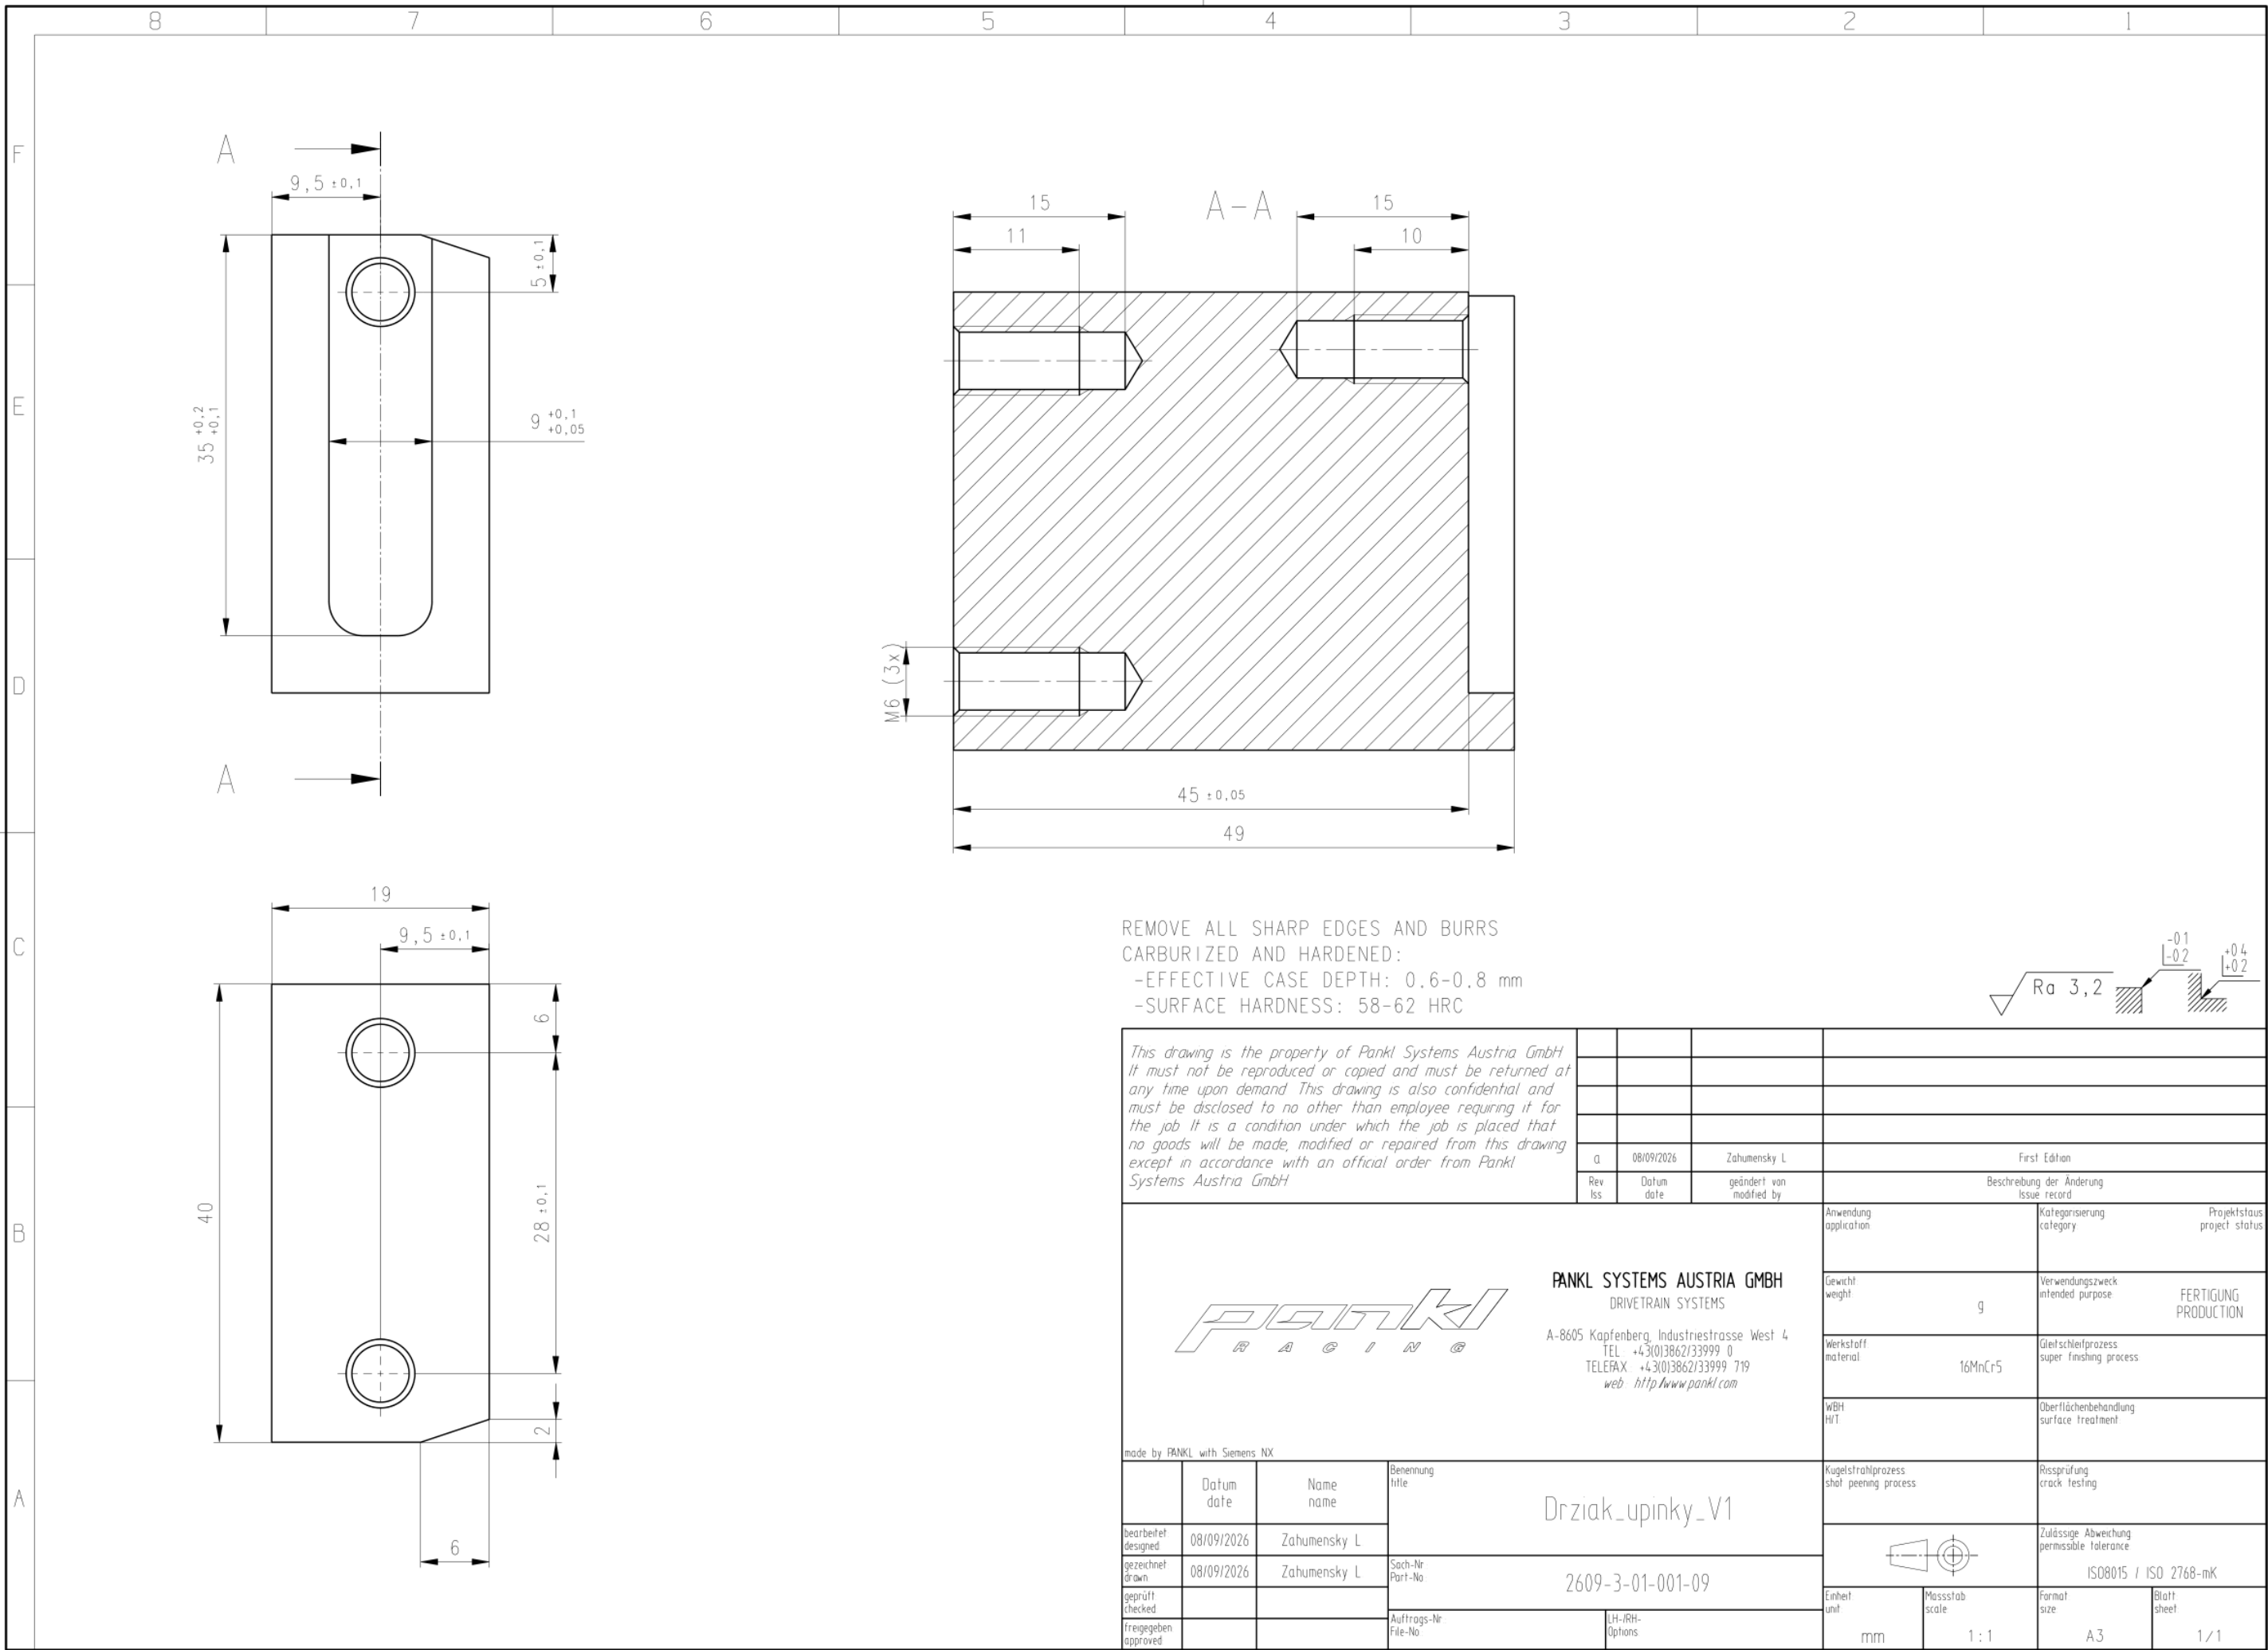

REMOVE ALL SHARP EDGES AND BURRS
CARBURIZED AND HARDENED:
-EFFECTIVE CASE DEPTH: 0.6-0.8 mm
-SURFACE HARDNESS: 58-62 HRC



This drawing is the property of Pankl Systems Austria GmbH
It must not be reproduced or copied and must be returned at
any time upon demand This drawing is also confidential and
must be disclosed to no other than employee requiring it for
the job It is a condition under which the job is placed that
no goods will be made, modified or repaired from this drawing
except in accordance with an official order from Pankl
Systems Austria GmbH

PANKL SYSTEMS AUSTRIA GMBH
DRIVETRAIN SYSTEMS
A-8605 Kapfenberg, Industriestrasse West 4
TEL +43(0)3862/33999 0
TELEFAX +43(0)3862/33999 719
web: <http://www.pankl.com>

made by PANKL with Siemens NX

	Datum date	Name name	Benennung title
bearbeitet designed	08/09/2026	Zahumensky L	Drziak_upinky_V1
gezeichnet drawn	08/09/2026	Zahumensky L	Sach-Nr Part-No
geprüft checked			2609-3-01-001-09
freigegeben approved			Auftrags-Nr File-No
			LH-IRH- Options

Anwendung application	Kategorisierung category	Projektstatus project status
Gewicht weight	g	Verwendungszweck intended purpose
Werkstoff material	16MnCr5	FERTIGUNG PRODUCTION
WBH H/T	Gleitschleifprozess super finishing process	Oberflächenbehandlung surface treatment
Kugelstrahlprozess shot peening process	Rissprüfung crack testing	Zulässige Abweichung permissible tolerance
		ISO8015 / ISO 2768-mK
Einheit unit	mm	Format size
Massstab scale	1 : 1	Blatt sheet
		A3
		1 / 1